


INTERPUMP PILOT FLEX 120

TFE1PF2

APPLICATIONS :

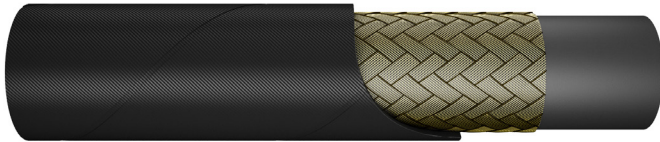

APPLICABLE SPECS. :

IMM SPECIFICATION

Smooth cover with high abrasion resistance. User friendly and Easy to Handle configuration. Extreme compactness and flexibility with the lowest bend radius. Tested up 1.000.000 cycles. Safety factor 4:1.

Internal hose: Synthetic rubber, extruded whole without joints, of uniform thickness.

Reinforcement: 1 high tensile steel wire braid.

Covering: Anti-abrasive synthetic rubber, resistant to oils, fuels and atmospheric conditions.

Recommended fluid: Mineral and biological oils, glycol-water based, water, lubricants.

Operating temperature: from -40 to +100°C (intermittent 120°C), from -40 to +70° C for water based fluids, from 0 to +70°C water, da 0 a +70°C acqua.

Part number	ID		Size	OD	Max WP		Min BP		Min BR		Weight		Ferrule
	in	mm		mm	bar	psi	bar	psi	mm	inch	kg/m	lb/ft	
	TFE1PF2-03	3/16"	4.8	3	9.0	120	1750	480	7000	20	0.787	0.10	0.067
TFE1PF2-04	1/4"	6.4	4	10.7	120	1750	480	7000	25	0.984	0.13	0.087	001C-04
TFE1PF2-05	5/16"	8.0	5	13.0	120	1750	480	7000	30	1.181	0.19	0.130	001C-05

Size 03 and 04 available with reduced fittings 001C-03SW and 001C-04SW / 0350-03-02SW and 0350-04-02SW.


MARKING: Available only "mylar"

INTERPUMP PILOT PLUS 150

APPLICAZIONI:



TFE0P15

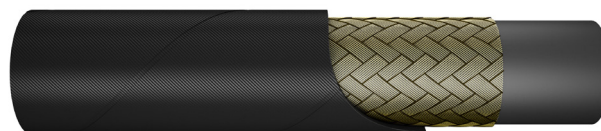

SPECIFICHE APPLICABILI:

IMM SPECIFICATION

Tubo leggero e compatto. Elevata flessibilità. Testato fino ad 1.000.000 cicli alla pressione d'esercizio.

Tubo interno: Gomma sintetica, estrusa senza giunzioni e di spessore uniforme.

Rinforzo: 1 treccia acciaio alta resistenza.

Copertura: Gomma sintetica antiabrasiva resistente agli olii, ai carburanti ed agli agenti atmosferici.

Fluidi raccomandati: Oli minerali e biologici, emulsioni acqua-glicole, acqua, lubrificanti.

Temperatura di esercizio: da -40 a +120°C (135°C intermittente), da -40 a +70°C per fluidi a base acqua, da 0 a +70°C acqua.

Part number	ID		Size	OD mm	Max WP		Min BP		Min BR		Weight		Ferrule
	in	mm			bar	psi	bar	psi	mm	inch	kg/m	lb/ft	
	TFE0P15-03	3/16"	4.8	3	10.5	150	2175	600	8700	20	0.787	0.15	0.101
TFE0P15-04	1/4"	6.4	4	11.5	150	2175	600	8700	25	0.984	0.163	0.109	001C-04
TFE0P15-05	5/16"	8.0	5	13.1	150	2175	600	8700	30	1.181	0.193	0.130	001C-05
TFE0P15-06	3/8"	9.5	6	14.8	150	2175	600	8700	40	1.575	0.224	0.150	001C-06
TFE0P15-08	1/2"	12.7	8	17.9	150	2175	600	8700	50	1.969	0.285	0.191	001C-08

Disponibile a richiesta nella versione con copertura liscia (in caso di ordine utilizzare il codice TFE1P15)

NOTA: Ordinabile da Aprile 2018

MARCATURA: Disponibile solo in versione "transfer"

ih INTERPUMP Pilot Plus 150 DN 5 I.D. 3/16" - W.P. 15 MPa/2175 PSI